



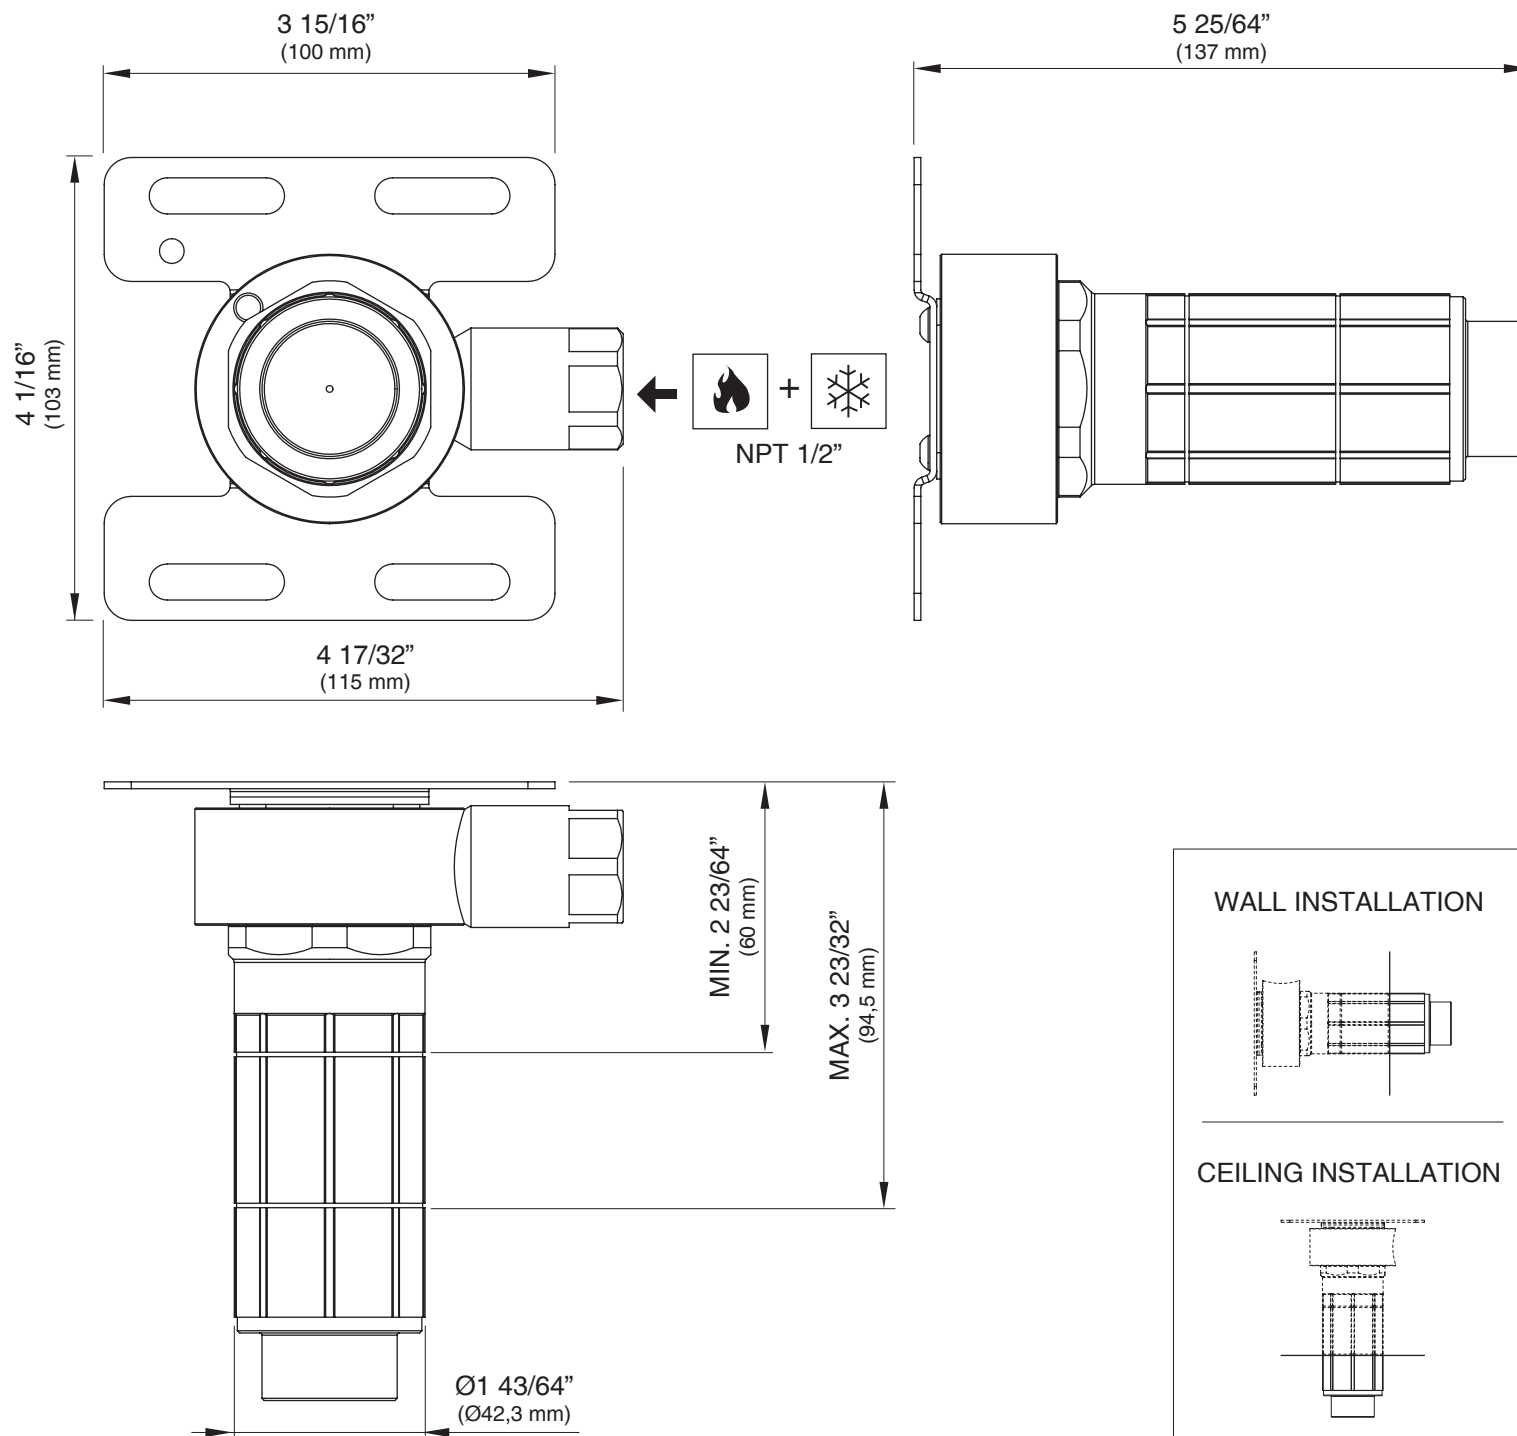

AINC03

_REV1.1



REGISTERED PATENT
CEADESIGN

AISI 304 STAINLESS STEEL

Rough-in part for spouts, shower heads and hand showers







RELATED CERTIFIED PRODUCTS

ABRA01 - ABRA02 - ABRA03 - ABRA04 - ABRA05
 ABRA06 - ABRA07 - ABRA08 - ACAR14 - AFRE17
 AFRE19 - AFRE41 - AFRE52 - AFRE94 - AMIL45
 AMIL46 - AMIL47 - AMIL48 - ANEU39

CEADESIGN SRL s.u. has the property rights on these drawings, therefore they cannot be used and/or transferred to third party, even in partial form, without any prior authorization. Furthermore CEADESIGN SRL s.u. reserves the right to apply any change to these drawings in order to upgrade the product.

CEA

ceadesign.it

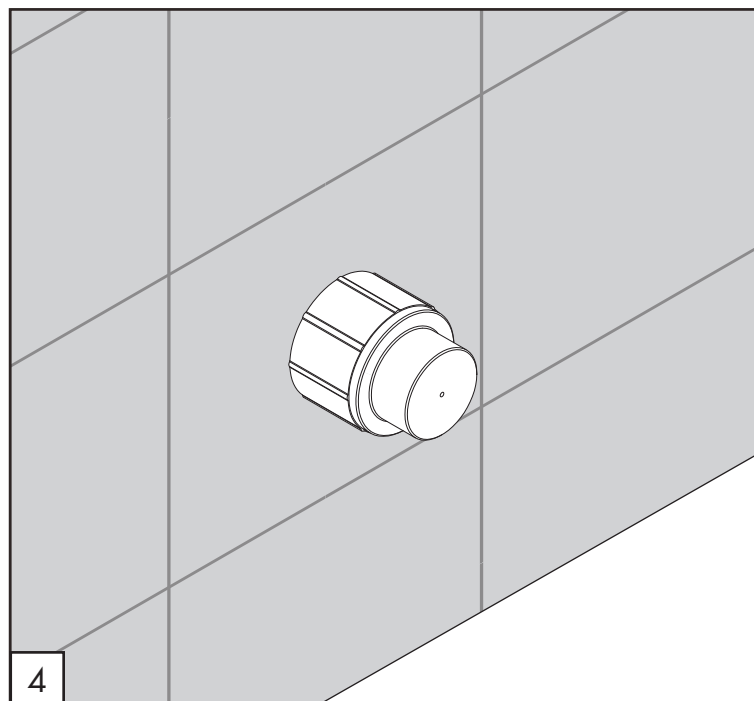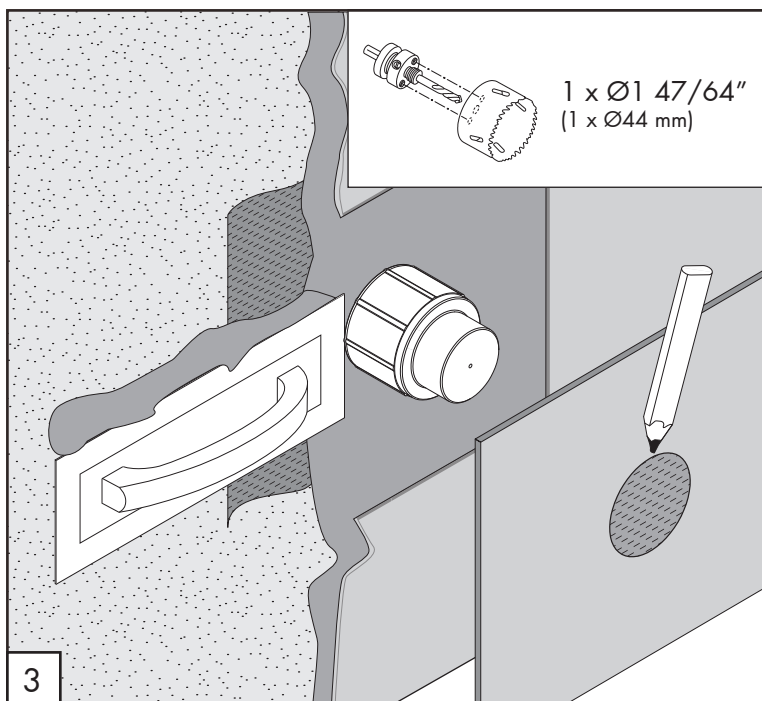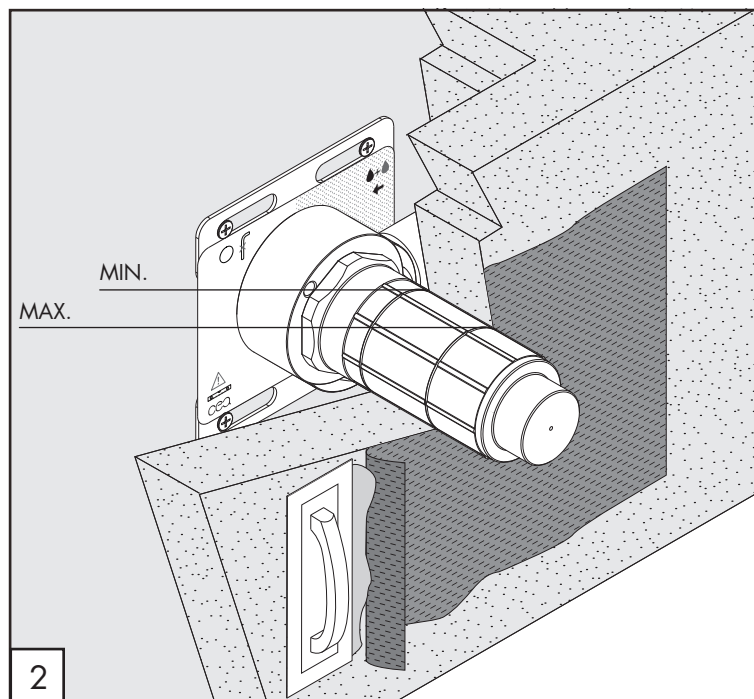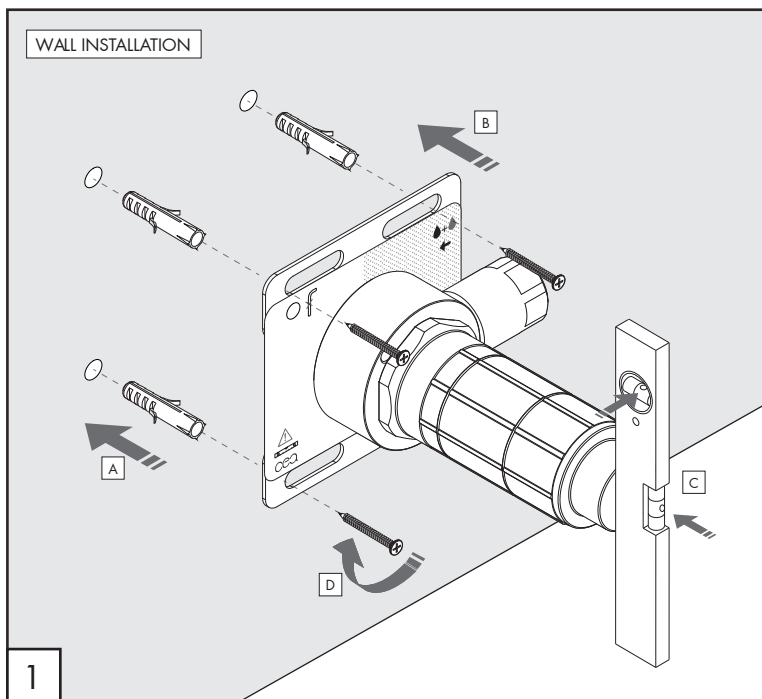

AINC03 _REV1.1

TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.

ADVERTENCIA TÉCNICA

Los tubos tienen que ser enjuagados a fondo antes de la instalación.

ADVERTISSEMENTS TECHNIQUES

Rincer les tuyaux avant l'installation.

AVVERTENZE TECNICHE

Risciacquare bene le tubazioni prima del montaggio.

WORKING TEMPERATURE

max. 158 °F


FLOW RATE

BAR	gpm
1	6.7
2	8.4
3*	9.9
4	11.2
5	11.5


* Recommended pressure

CEQ


CEILING INSTALLATION

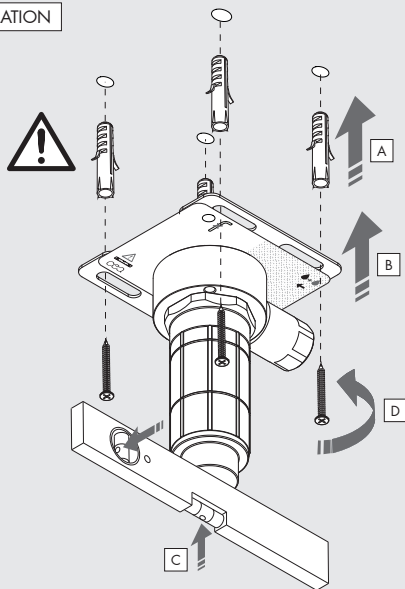


1




1 x Ø1 47/64"
(1 x Ø44 mm)

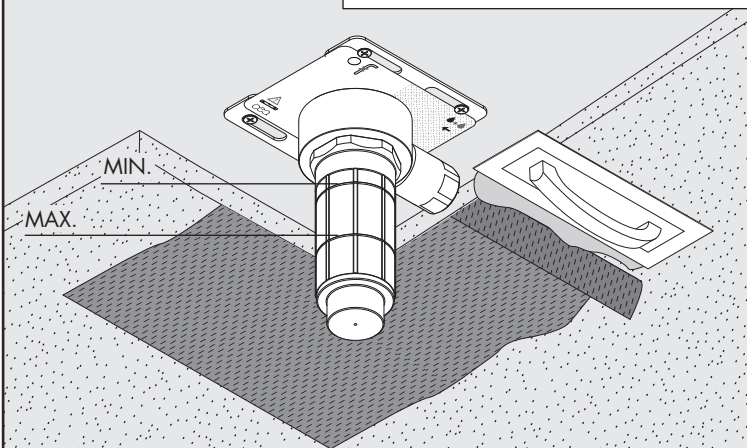

2

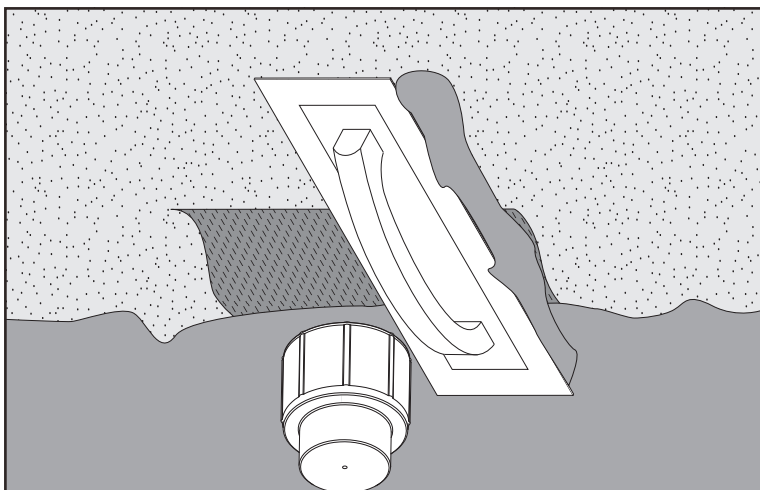

3



4

AINC03 _REV1.1



In the case of false ceilings, provide a rigid structure to install the built-in part.

En el caso de falsos techos prever una estructura rígida para la fijación del cuerpo empotrado.

En cas de faux-plafond prévoir une structure rigide pour la fixation du corps à encastrer.


Nel caso di controsoffitti prevedere una struttura rigida per il fissaggio dell'incasso.

CEQ

ceadesign.it

SPARE PARTS

RICP039	Protective covering
RICP052	Protective covering
RICS115	Insulation membrane

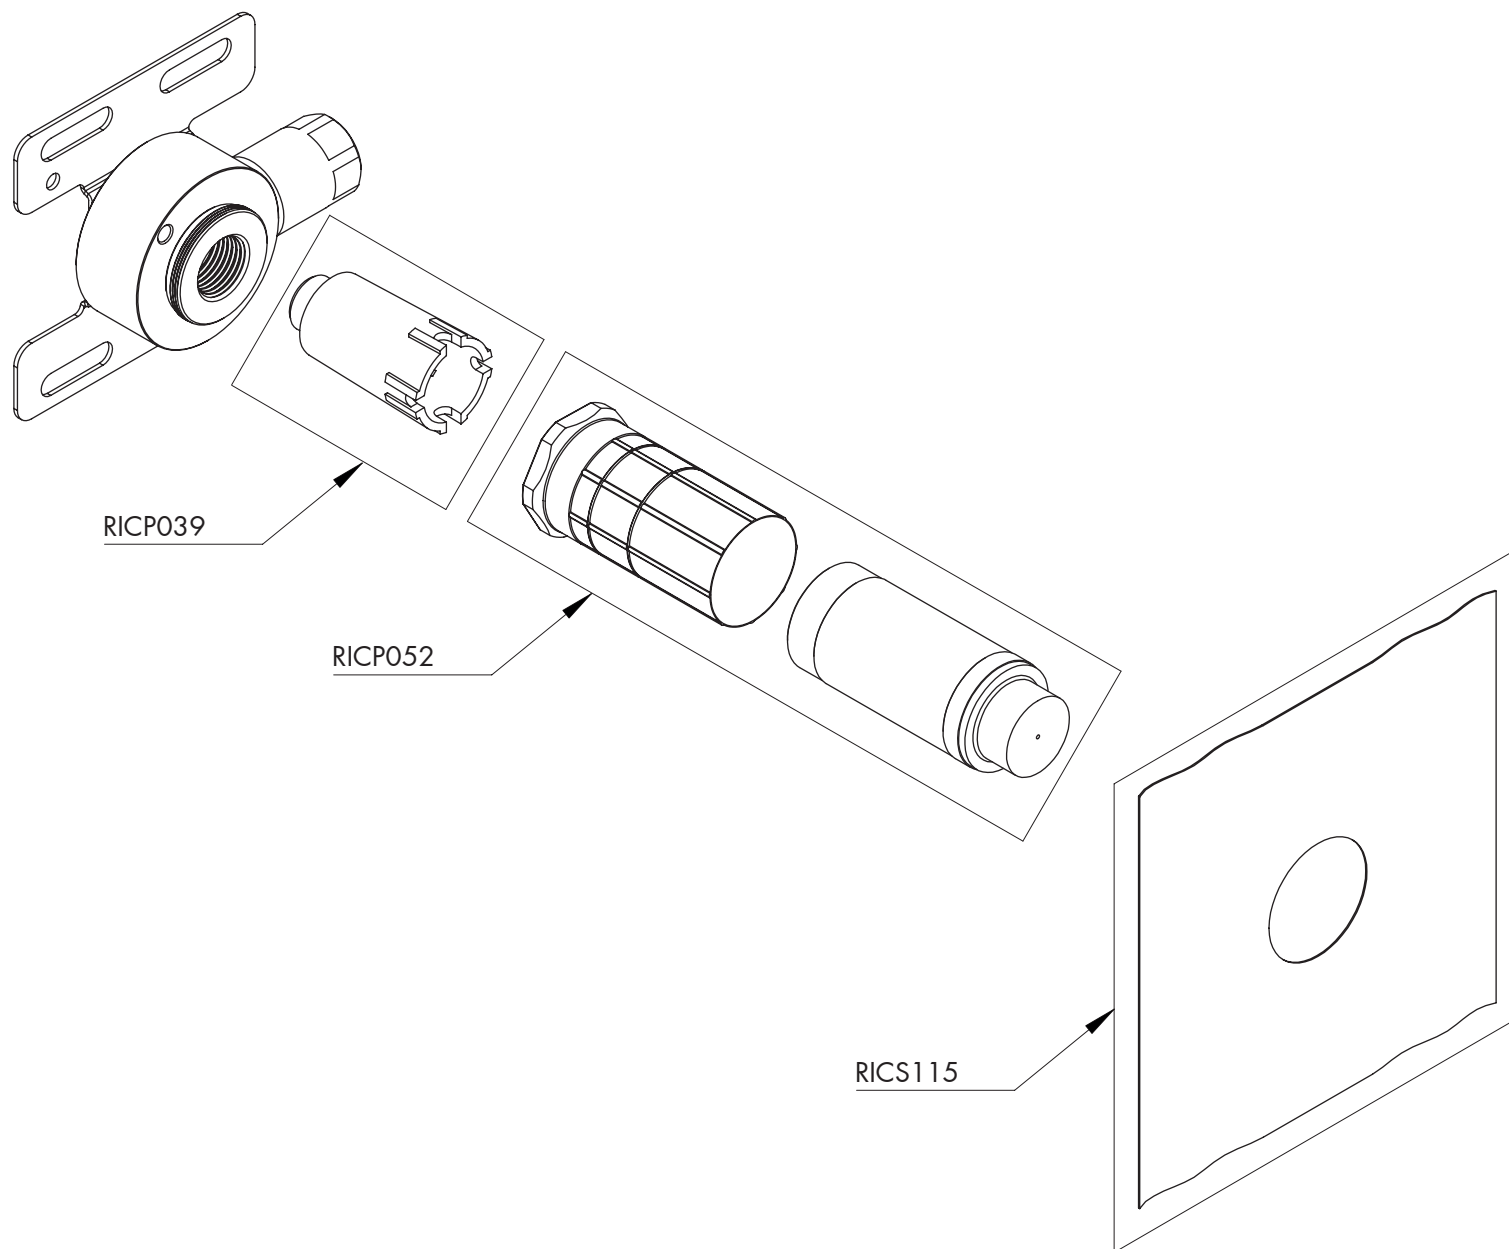

LEGEND

ICONS



Tool included in spare part