

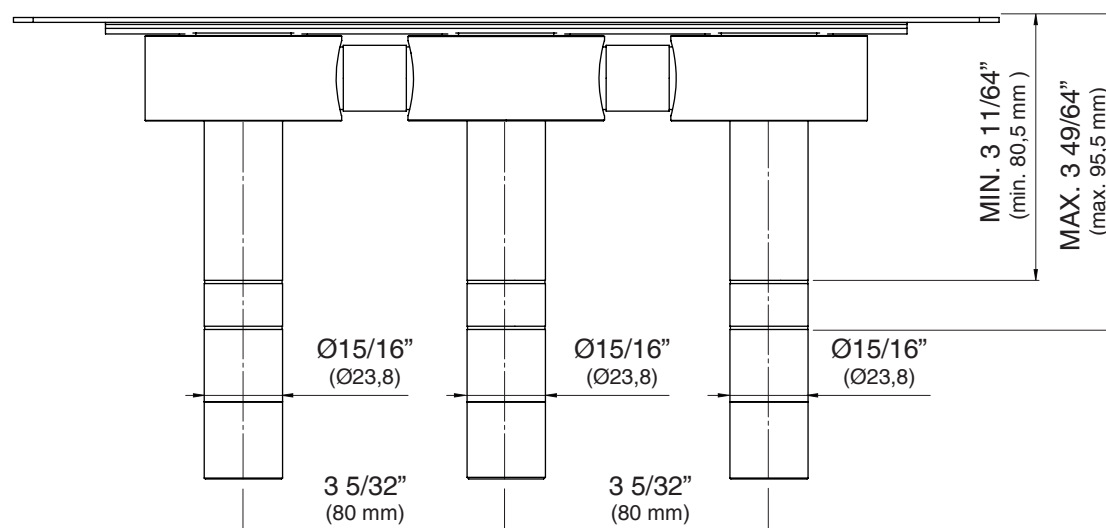


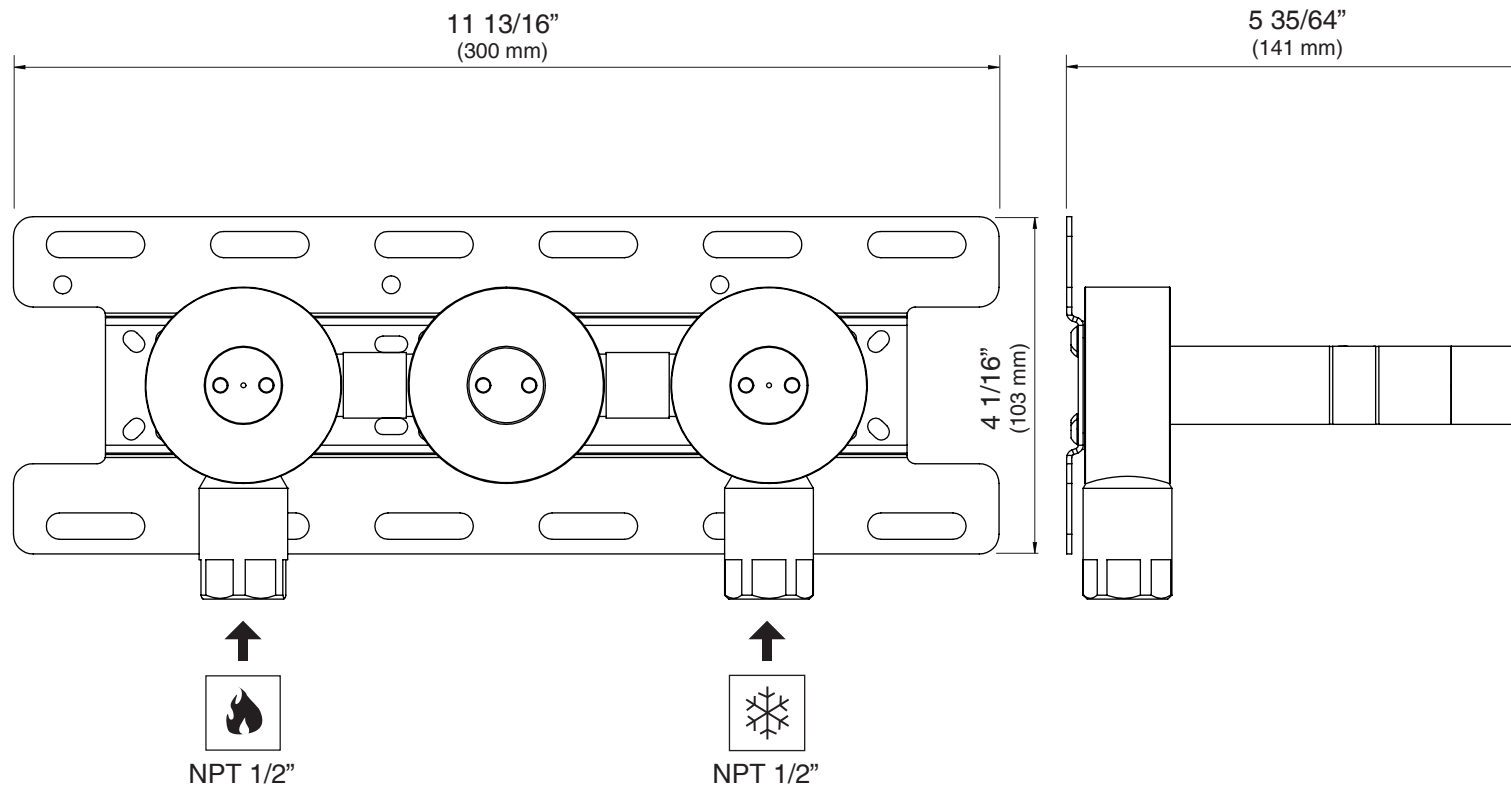

APTR02

_REV10

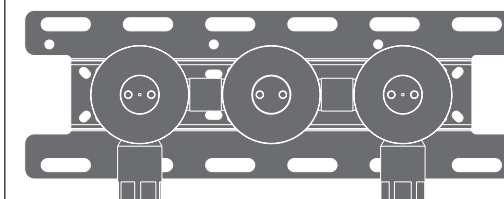

REGISTERED PATENT
CEADESIGN

AISI 304 STAINLESS STEEL

Universal built-in part that allows to adjust its depth into the wall



RELATED PRODUCTS

BAR25 - BAR26 - CRX15 - CRX16 - CRX17 - CRX18
DET24 - DET25 - DET26 - DET27 - FLG09 - FLG10 - FLG11
FLG12 - GIO13 - GIO14 - GIO15 - GIO43 - ZIQ07
ZIQ08 - ZIQ09 - ZIQ57







If you wish to use a spout other than those supplied in the external part provided (RELATED PRODUCTS), it is necessary to add the fitting with the reduction G 3/8" - G 3/8" (code RICT030) or reduction G 1/2" - G 3/8" (code RICT050)

CEADESIGN SRL s.u. has the property rights on these drawings, therefore they cannot be used and/or transferred to third party, even in partial form, without any prior authorization. Furthermore CEADESIGN SRL s.u. reserves the right to apply any change to these drawings in order to upgrade the product.

CEA

ceadesign.it

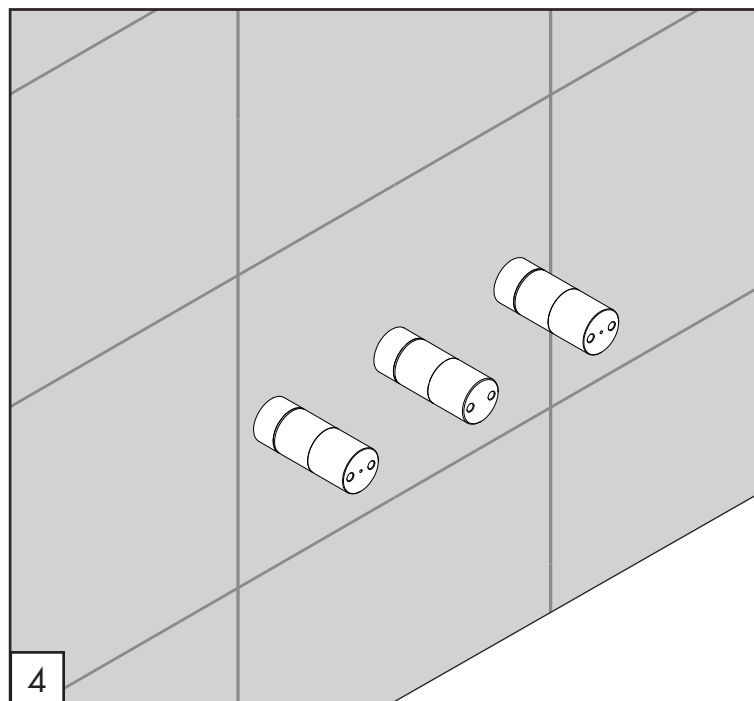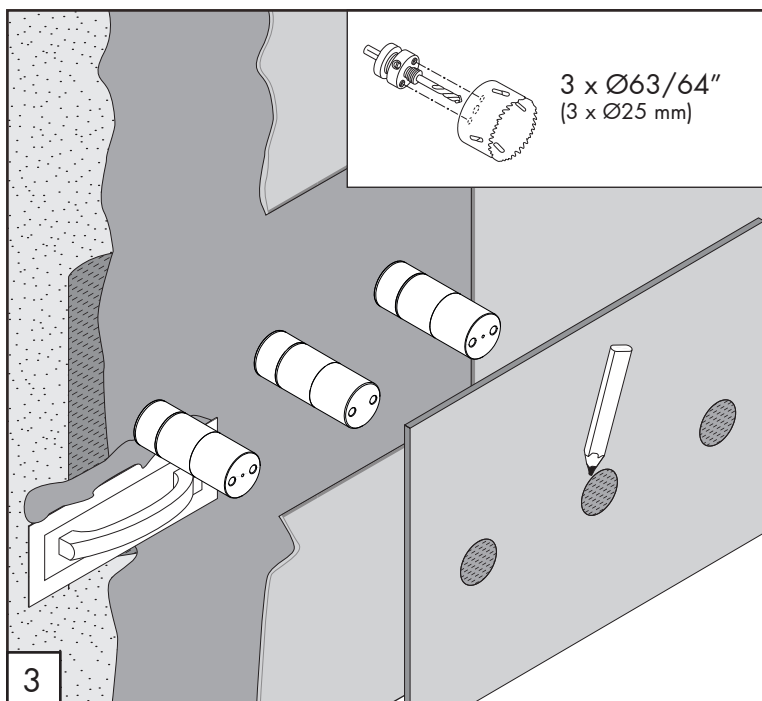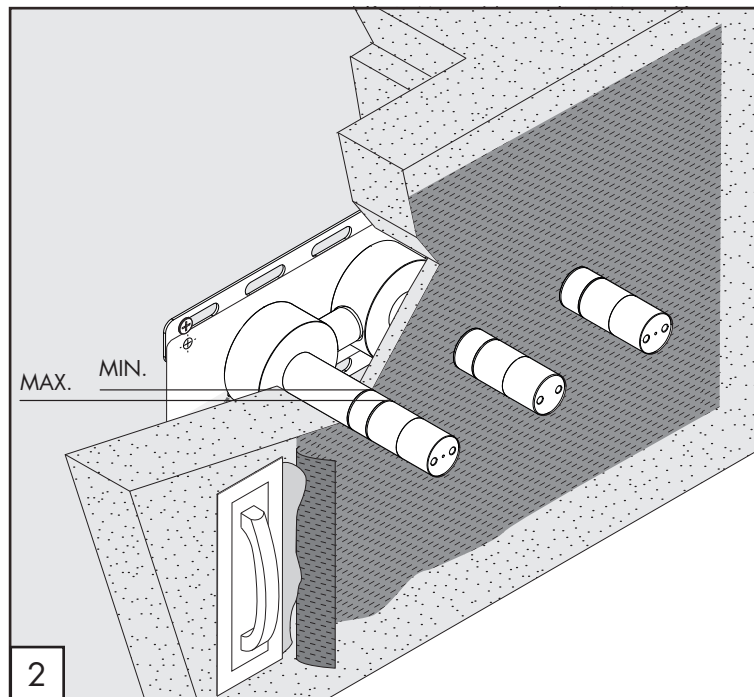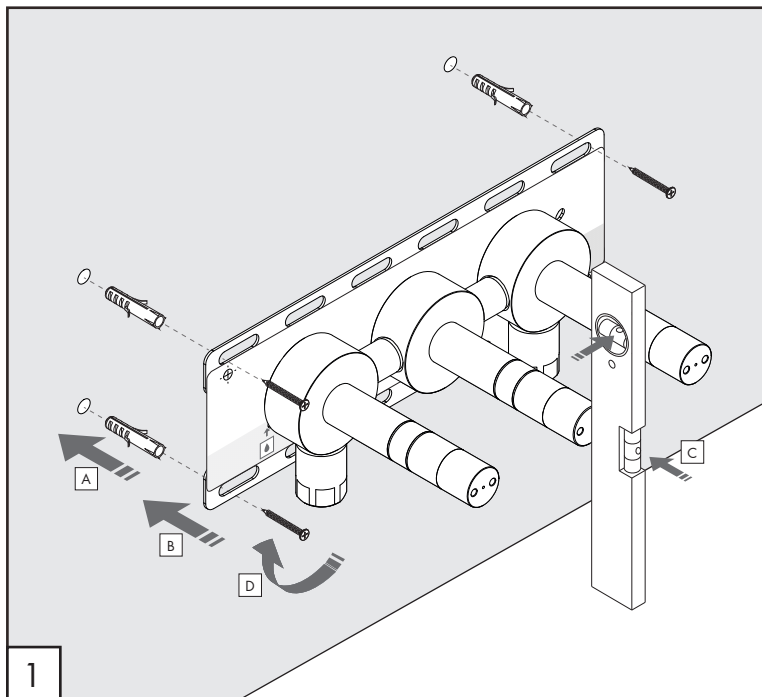

APTR02_REV10



TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation.
Avoid pressure differences between hot and cold water supply.
Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

ADVERTENCIA TÉCNICA

Los tubos tienen que ser enjuagados a fondo antes de la instalación. Evitar grandes diferencias de presión entre las conexiones de agua caliente y fría. En caso de presión estática mayor de 5 bar, se recomienda el uso de un adaptador de presión para evitar daños en el cartucho.

ADVERTISSEMENTS TECHNIQUES

Rincer les tuyaux avant l'installation. Eviter des grandes différences de pression entre l'eau froide et chaude. En cas de pressions statique de plus de 5 bar, nous vous recommandons d'installer un réducteur de pression pour éviter des dommages à la cartouche.

AVVERTENZE TECNICHE

Risciacquare bene le tubazioni prima del montaggio ed evitare sbalzi di pressione fra i raccordi d'acqua fredda e d'acqua calda. In caso di pressioni statiche superiori a 5 bar si raccomanda l'installazione di un riduttore di pressione per evitare danni alla cartuccia.

WORKING TEMPERATURE

max. 158 °F

FLOW RATE

BAR	gpm
1	3.9
2	5.5
3*	6.8
4	7.8
5	8.7


* Recommended pressure

CEQ

ceadesign.it

SPARE PARTS

RICP021	Protective covering
RICP027	Protective covering
RICS107	Insulation membran
RICS317	Telescopic extension
RICV029	Shut-off valve
RICV030	Shut-off valve

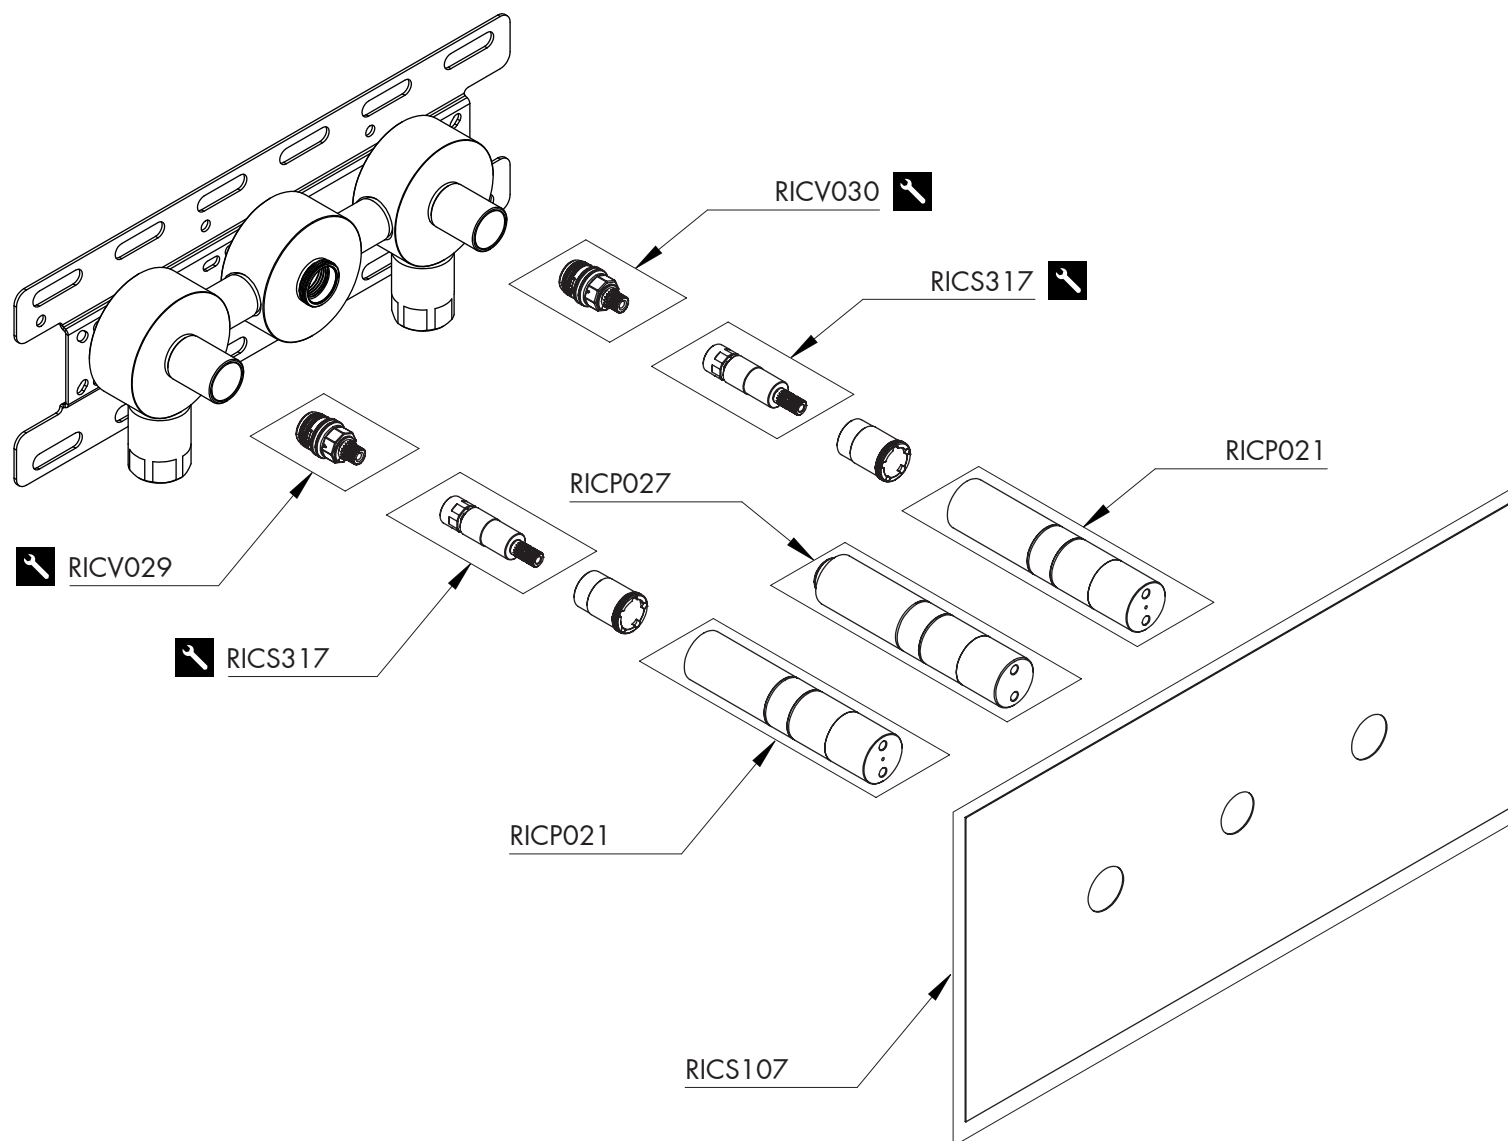

LEGEND

ICONS



Tool included in spare part