


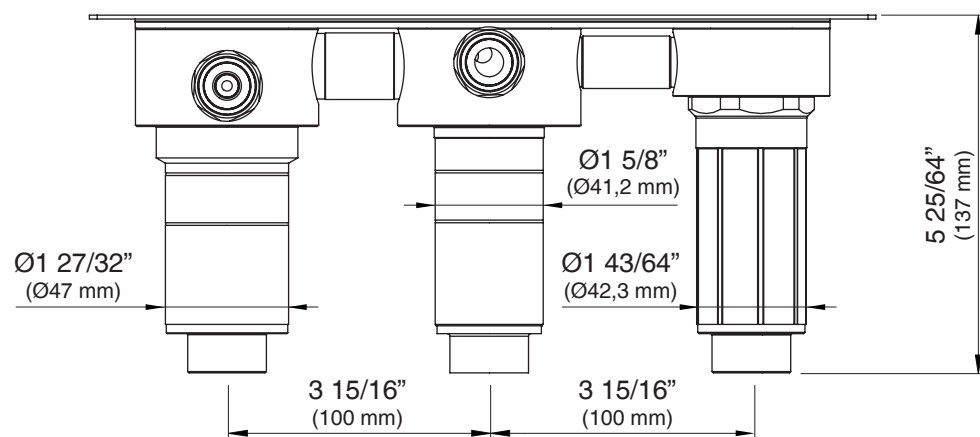
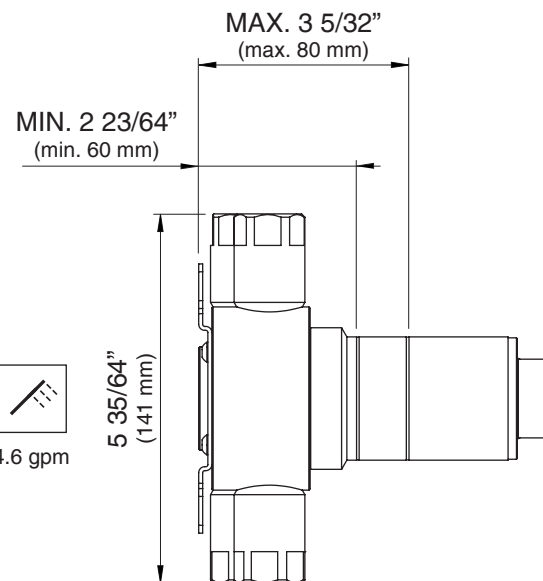


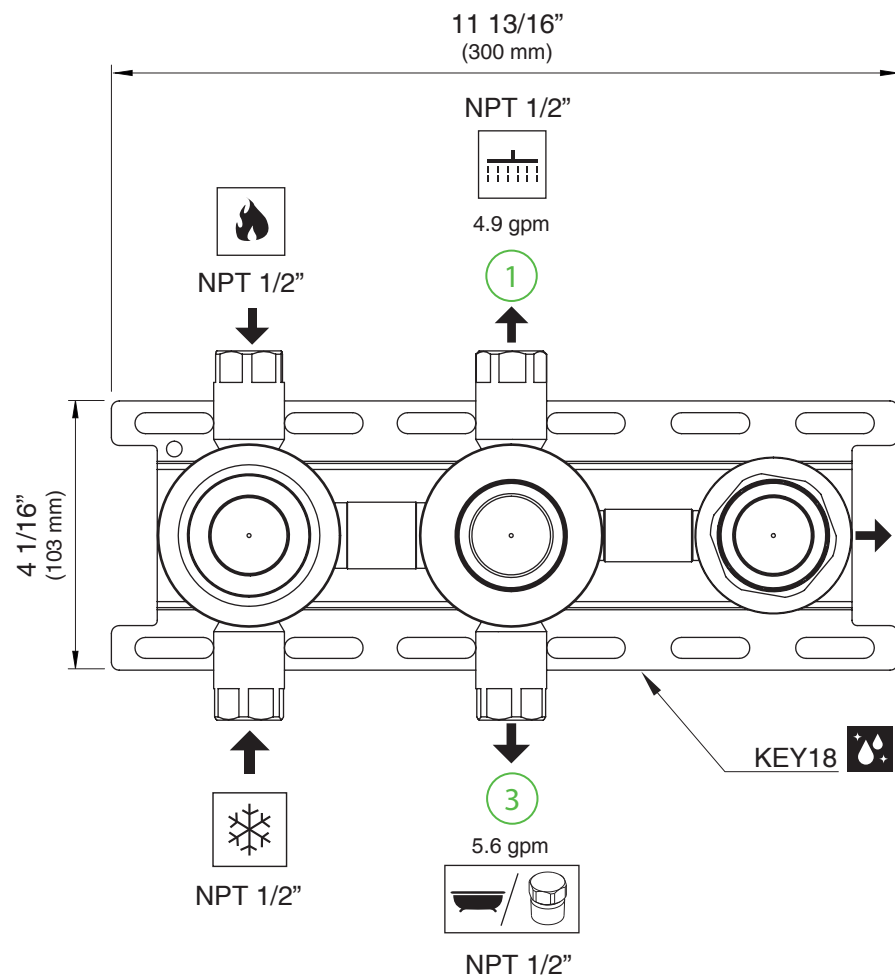


INCLUDED PLUG
NPT 1/2"



HANDLE ROTATION

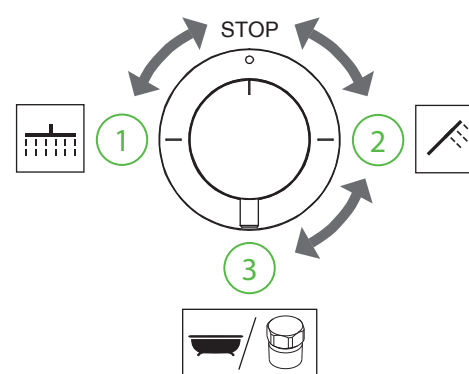

AUCS25 _ REV10

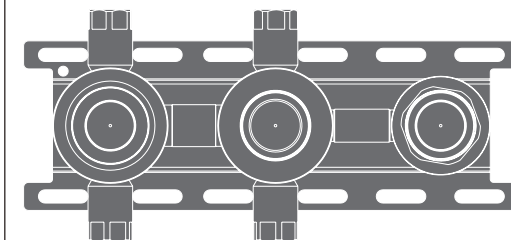

REGISTERED PATENT
CEADESIGN

AISI 304 STAINLESS STEEL

Universal rough-in part to be combined with
INNOVO / MILO360 collections



Key for cleaning out the water system





RELATED CERTIFIED PRODUCTS

AINV59 - AINV60 - AMIL116

CEADESIGN SRL s.u. has the property rights on these drawings, therefore they cannot be used and/or transferred to third party, even in partial form, without any prior authorization. Furthermore CEADESIGN SRL s.u. reserves the right to apply any change to these drawings in order to upgrade the product.

cea

ceadesign.it

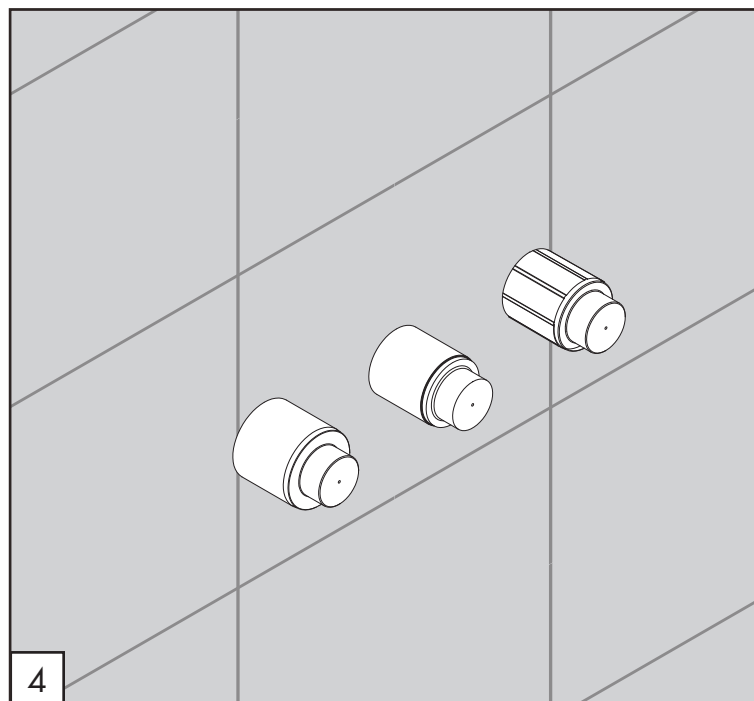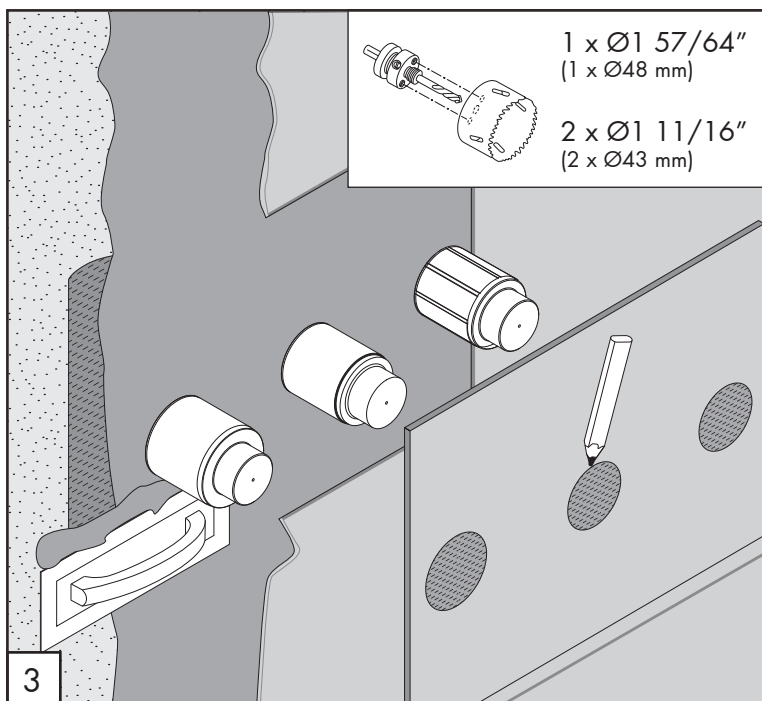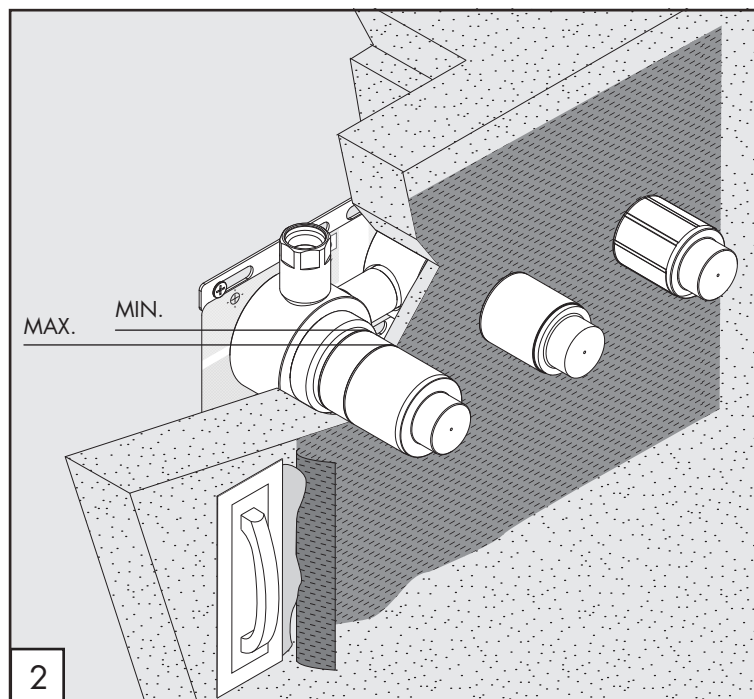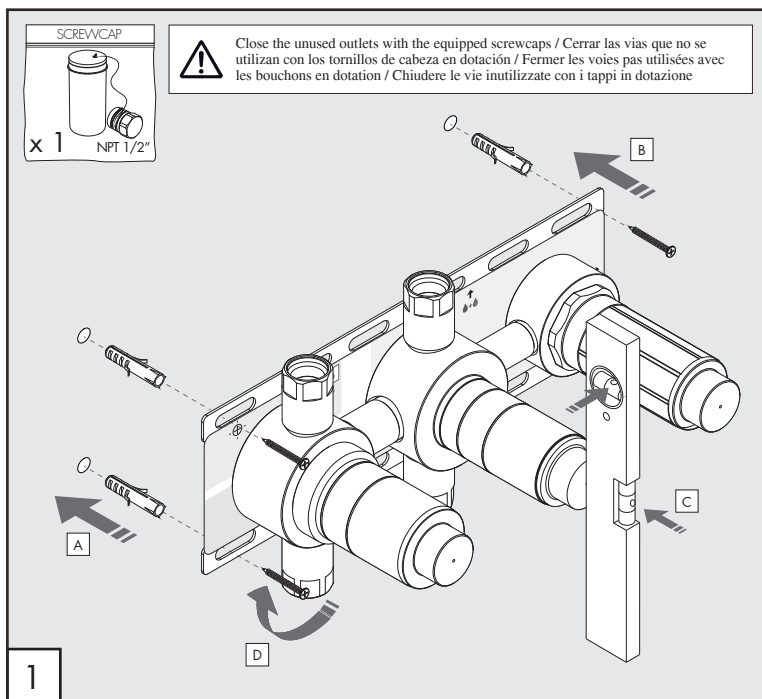

AUCS25 _REV10



TECHNICAL WARNINGS

The pipes have to be rinsed thoroughly before installation. Avoid pressure differences between hot and cold water supply. Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage of the cartridge.

ADVERTENCIA TÉCNICA

Los tubos tienen que ser enjuagados a fondo antes de la instalación. Evitar grandes diferencias de presión entre las conexiones de agua caliente y fría. En caso de presión estática mayor de 5 bar, se recomienda el uso de un adaptador de presión para evitar daños en el cartucho.

ADVERTISSEMENTS TECHNIQUES

Rincer les tuyaux avant l'installation. Eviter des grandes différences de pression entre l'eau froide et chaude. En cas de pressions statique de plus de 5 bar, nous vous recommandons d'installer un réducteur de pression pour éviter des dommages à la cartouche.

AVVERTENZE TECNICHE

Risciacquare bene le tubazioni prima del montaggio ed evitare sbalzi di pressione fra i raccordi d'acqua fredda e d'acqua calda. In caso di pressioni statiche superiori a 5 bar si raccomanda l'installazione di un riduttore di pressione per evitare danni alla cartuccia.

WORKING TEMPERATURE

max. 149 °F

FLOW RATE

BAR	outlet 1	outlet 2	outlet 3
	gpm	gpm	gpm
1	2.8	2.7	3.3
2	4.0	3.8	4.6
3*	4.9	4.6	5.6
4	5.6	5.3	6.5
5	6.2	5.9	7.2


* Recommended pressure

CEQ

ceadesign.it

SPARE PARTS

RICC035	Cartridge
RICC100	Cartridge
RICC101	Cartridge
RICP007	Protective covering
RICP016	Protective covering
RICP039	Protective covering
RICP054	Protective covering
RICS155	Insulation membrane
RICT061	Plug

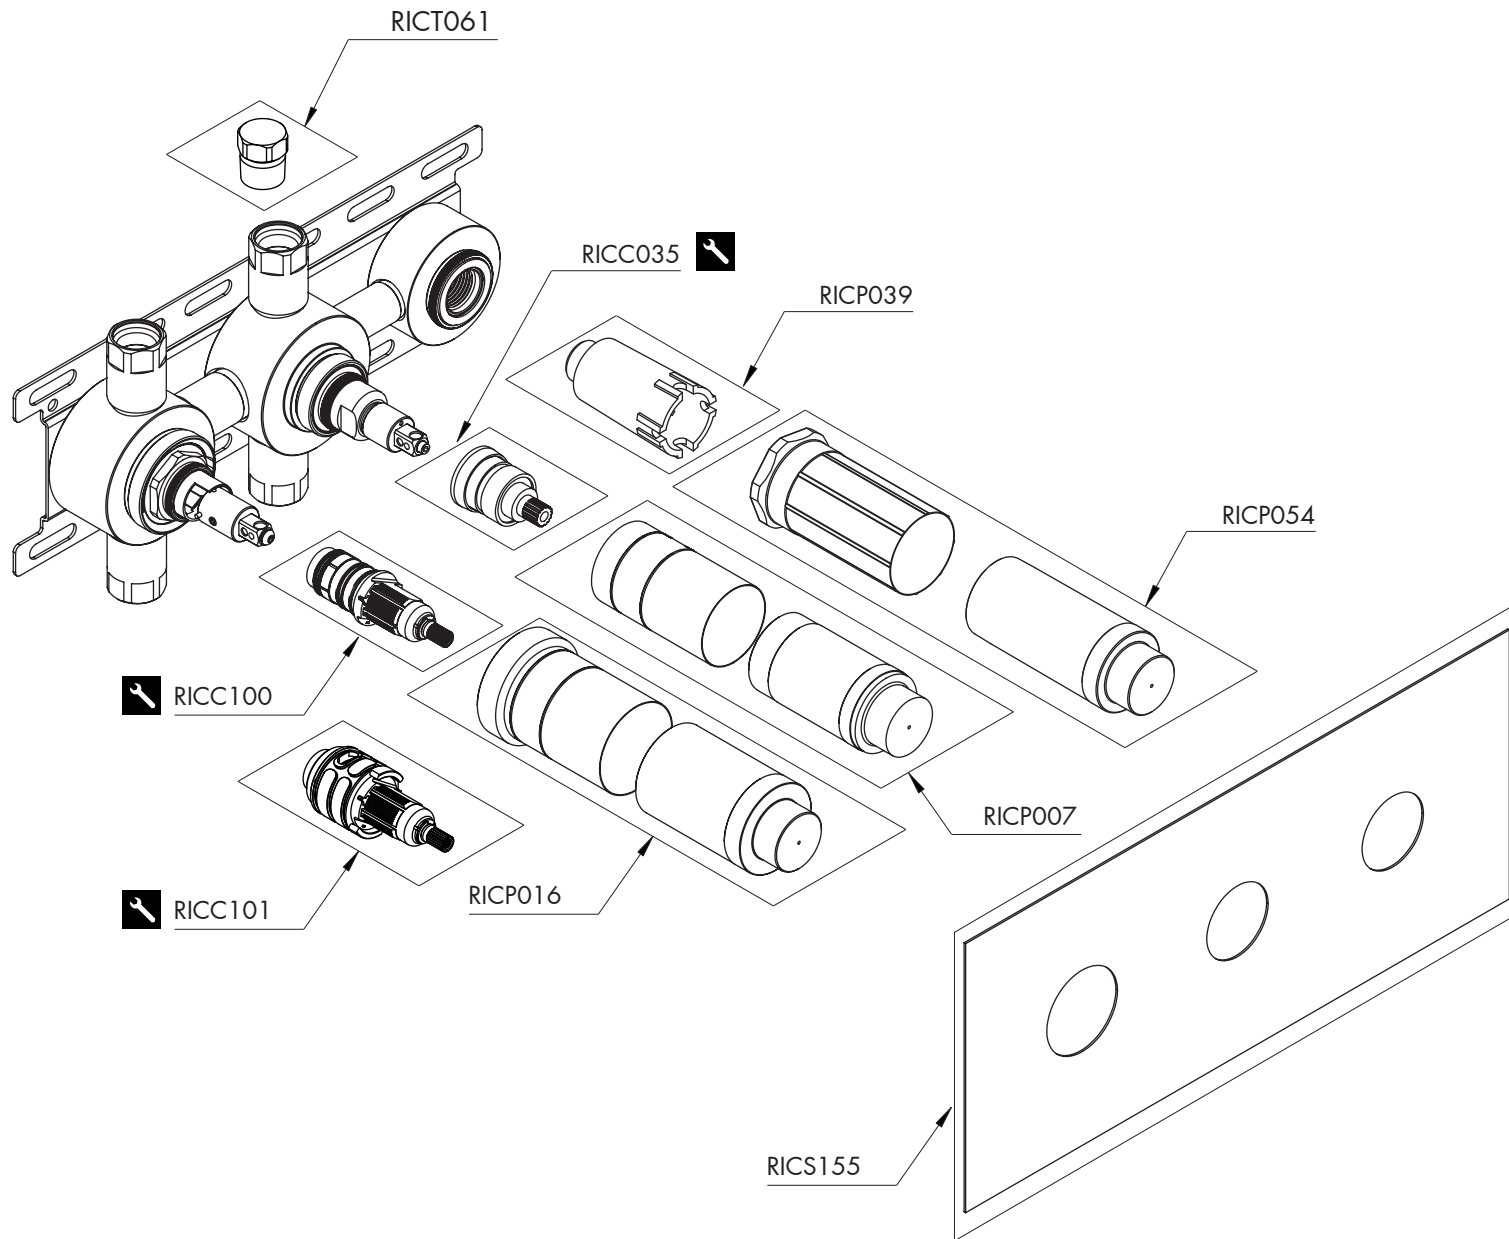

LEGEND

ICONS



Tool included in spare part